


E.O.T. Overhead Crane Blocks

- Available as standard for SWL(S) 2 to 50 tons
- Made also with larger Sheaves for up to 250 tons SWL or to your detailed specification and/or drawing
- Available with hooks as illustrated or with spring operated or gravity operated catch or of course with Ramshorn Hook.



INFORMATION REQUIRED WITH ENQUIRY OR ORDER

Type of block- Side Sheaves Block (over head)
 Special Block Number where applicable
 Safe Working load.
 Rope Diameter.
 Number of Sheaves per Block.
 Type of Bearing.
 Hook fitted with - Thrust Race, ThrustPad, Plain Collar or Thrust Washer.
 Hook fitted with - Gravity Safety Catch or Spring Safety Catch.
 Block fitted Becket and type of rope terminal fitting to be acommodated.
 Classification of Crane.
 Block Working Conditions Electro-magnet Underwater
 Irregular Maintenance High/Low Temp.
 Finish.
 Class of Inspection.
 Any additional Information, e.g. swivel locking device, cable clamp, etc.

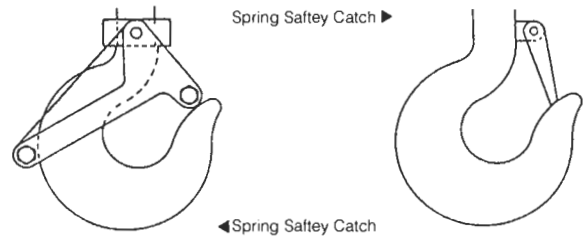

D - Safe working load in tonnes F - Sheave outside diameter
 E - Number of sheaves B - Rope diameter



MOST POPULAR SIZES REQUESTED

	3	5	10	15	20
D					
F	194mm	254mm	318mm	357mm	406mm
E	2	2	2	2	2
B	10mm	12mm	16mm	18mm	20mm

For alternative headfittings see options


Mobile Crane Blocks

- Up to 750 tonnes S.W.L.

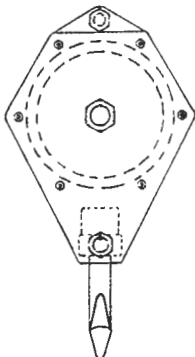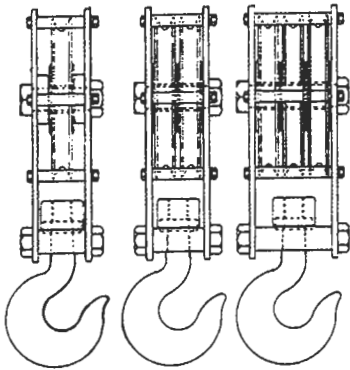

INFORMATION REQUIRED WITH ENQUIRY OR ORDER

Type of block- Bottom Block (Mobile)
 Special Block
 Safe Working load.
 Rope Diameter.
 Number of Sheaves per Block.
 Type of Bearing.
 Hook fitted with - Thrust Race, ThrustPad, Plain Collar or Thrust Washer.
 Hook fitted with - Gravity Safety Catch or Spring Safety Catch.
 Block fitted Becket and type of rope terminal fitting to be acommodated.
 Classification of Crane.
 Block Working Conditions Electro-magnet Underwater
 Irregular Maintenance High/Low Temp.
 Finish.
 Class of Inspection.
 Any additional Information, e.g. swivel locking device, cable clamp, etc.

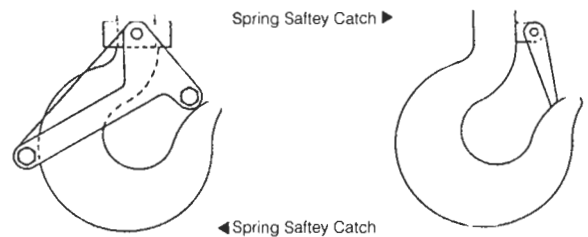

D - Safe working load in tonnes F - Sheave outside diameter
 E - Number of sheaves B - Rope diameter

MOST POPULAR SIZES REQUESTED

	3	5	10	15	20
D					
F	194mm	254mm	318mm	357mm	406mm
E	1	2	2	3	3
B	10mm	12mm	16mm	18mm	20mm